



Decompression Sickness (DCS) Risk Mitigation

OCHMO-TB-037
Rev C

Executive Summary

Denitrogenation protocols (removing nitrogen from the body) are employed to minimize the risk of decompression sickness (DCS), which is the formulation of gas emboli (bubbles) during suited extravehicular activities (EVAs). Moving from a higher pressure to a lower pressure too quickly and without adequate denitrogenation can cause bubbles to form in the body. DCS should also be minimized during off-nominal events such as cabin depressurization. If a suit (LEA-Launch, Entry, Abort) is utilized during a cabin depressurization event, it requires sufficient pressure relative to the initial cabin pressure to be effective. DCS mitigation protocols are implemented through the combination of habitat, EVA suit pressure, and breathing gas procedures to achieve nominal mission operations.



Houston We Have a Podcast:

The NASA research into preventing decompression sickness for astronauts who will walk on the Moon in future Artemis missions.

[Ep269: Locked In, Pressure Low | NASA](#)



Relevant Technical Requirements

NASA-STD-3001 Volume 1, Rev C

- [V1 3003] In-Mission Preventive Health Care
- [V1 3004] In-Mission Medical Care
- [V1 5001] Medical Training
- [V1 5002] Crewmember Training
- [V1 5003] Crew Medical Officer Medical Training

NASA-STD-3001 Volume 2, Rev D

- [V2 6002] Inert Diluent Gas
- [V2 6003] O₂ Partial Pressure Range for Crew Exposure
- [V2 6006] Total Pressure Tolerance Range for Indefinite Crew Exposure
- [V2 6007] Rate of Pressure Change
- [V2 6008] Decompression Sickness (DCS) Risk Identification
- [V2 6009] Decompression Sickness Treatment Capability
- [V2 6017] Atmospheric Control
- [V2 6022] Atmospheric Monitoring and Alerting Parameters
- [V2 7043] Medical Capability
- [V2 9053] Protective Equipment
- [V2 11100] Pressure Suits for Protection from Cabin Depressurization
- [V2 11032] LEA Suited Decompression Sickness Prevention Capability
- [V2 11036] Suited Atmospheric Monitoring and Alerting


Background

Decompression Sickness Mitigation/Prevention/Treatment

- DCS is a major concern in spaceflight, as well as in certain terrestrial settings, due to the negative consequences during and after DCS occurrence.
- DCS is the result of nitrogen bubbles (or other gas emboli) causing damage to tissue.
 - Gas emboli can be classified as venous gas emboli (VGE) or arterial gas emboli (AGE).
 - VGE are removed from circulation by the lungs, whereas AGE compromises tissue oxygenation and therefore is more serious.
 - Conkin, et al. (3) describes DCS as, “[When an] astronaut travels to a hypobaric environment, the amount of inert gas in excess of what can be held in solution at the new lower pressure has the potential to come out of solution to form gas spaces that can displace or otherwise damage tissues.”
- DCS is typically mitigated with prebreathe protocols – denitrogenation of the body with oxygen.
- The risk of DCS is shown to increase during ambulation and periods of increased lower body activity on Earth.

Risks of Decompression Sickness

- **Type I:** joint pain, single extremity tingling or numbness, and mild skin symptoms.
- **Type II:** central nervous system or cardiovascular symptoms (potentially fatal). Symptoms can range from muscle weakness, confusion, impaired balance, and stroke.

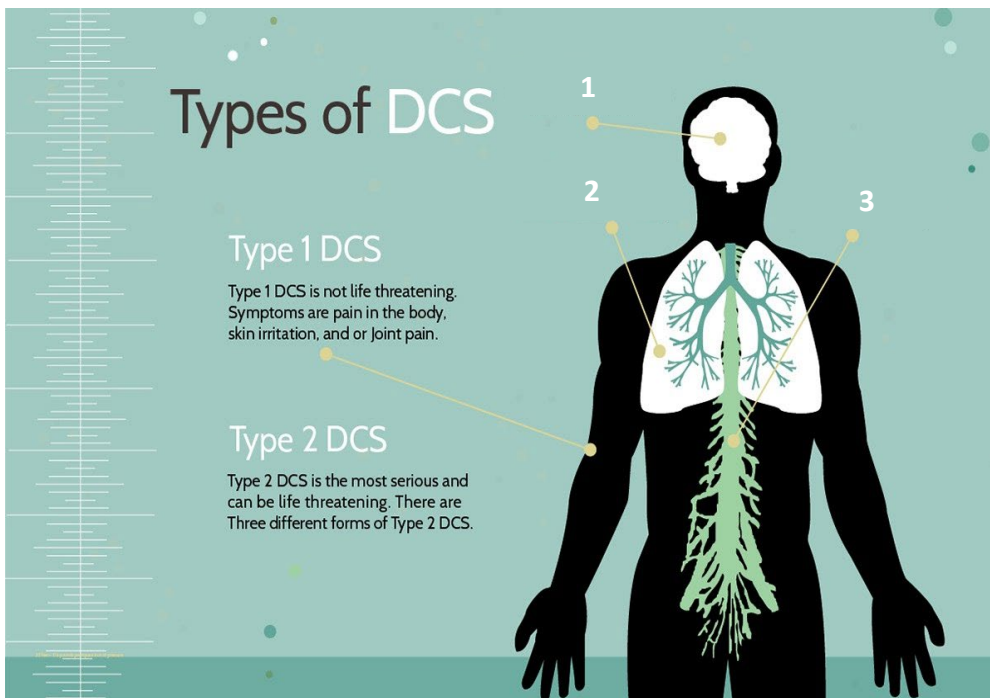

1. Central DCS is when bubbles get into the arterial blood stream and move to the brain, which can cause an arterial gas embolism.
2. Pulmonary DCS is very rare and only occurs when bubbles are in the lungs.
3. Neurological DCS is when nitrogen bubbles affect the nervous system and causes problems in the body.

The goal is to limit DCS risk to within acceptable levels through validated prebreathe protocols.



Reference Data

Decompression Sickness Mitigation/Prevention/Treatment

Past NASA Decompression Protocols for Prevention of DCS *NASA has never experienced a Type II event in spaceflight*

In-Suit 4-Hour Prebreathe

Astronaut breathes 100% O₂ in the spacesuit at 14.7 psia for 4 hours.

Campout Protocol

Significantly reduces the required in-suit prebreathe duration by having EVA crewmembers “camp out” in the ISS airlock at 10.2 psia, 26.5% O₂ during the night prior to their EVA. For various operational reasons, the time at 10.2 psia is limited to 8 hours and 40 minutes.

Exercise Protocol

Intense, short exercise regimen at 14.7 psia while breathing 100% O₂ combined with in-suit prebreathe at 10.2 psia.

In-Suit Light Exercise (ISLE) Protocol

A longer period of mild exercise in the EMU. The ISLE protocol shares many steps with the exercise prebreathe protocol but differs in that 40 minutes are spent breathing 100% O₂ by mask followed by a 20-minute depressurization to 10.2 psia.

Notes:

- DCS risk is significantly increased by ambulation and physical activity during altitude exposure, meaning ISS microgravity prebreathe protocols are not effective for planetary EVA.
- Apollo used a 100% O₂ cabin environment which eliminated DCS risk during EVA.

Past prebreathe protocols were between 3-5 hours. Utilizing a lower cabin pressure/higher oxygen concentration such as 8.2 psia with 34% O₂ can minimize the time to denitrogenate the body, which saves time and consumables.

The following pages detail a comparison of prebreathe durations and atmosphere compositions.

Application

Design Guidance

- The key to preventing DCS is to denitrogenate the body by breathing higher levels of oxygen and optimizing the pressures of the cabin and the suit.
- DCS requires cross discipline activities to provide effective mitigation:
 - Habitat pressure and oxygen concentration
 - Suit pressure and oxygen concentration
- Duration of prebreathe is determined by the pressure, percent oxygen, and nitrogen of the atmosphere. See the graph on the following page for prebreathe estimates based on 2.48 psia $P_{I}O_2$ and 4.3 psia space suit operating pressure.
- Ineffective designs can consume larger amounts of oxygen and take more time prior to initiating an EVA (from many hours to minutes).
- Treatment is performed using the total pressures from the vehicle and suit atmospheres.
 - When DCS symptoms occur, the suit and cabin pressure may be combined to resolve symptoms, or the cabin pressure needs to be increased. A minimum of 16.4 psia is recommended but is scenario dependent.
- Type II DCS prevention during a cabin depressurization may require the use of a suit (e.g., LEA suit).
 - The suit should be able to reach sufficient pressure to lessen DCS symptoms, if they cannot be prevented altogether.
 - An LEA suit pressure of 5.8 psia has been shown to reduce the risk of Type II DCS to <15% for a rapid depressurization. For more information, reference [OCHMO-TB-038 Decompression and LEA Suit Mishaps](#).




Astronaut Joe Acaba assisting crewmates Randy Bresnik and Mark Vande Hei before a spacewalk. Bresnik and Vande Hei were performing the In-Suit Light Exercise protocol where the astronauts perform light exercise and pre-breathe pure oxygen before beginning a spacewalk. The technique helps purge nitrogen bubbles from their bodies to prevent them from experiencing “the bends” at the lower pressure inside the space suit.



Reference Data

Prebreathe Estimates vs. O₂ Concentration & Cabin Pressure

The graph below is an estimate of prebreathe times vs. oxygen levels and cabin pressure at a hypoxic limit of 2.48 P_iO₂ for EVAs with a suit pressure of 4.3 psia. At 8.2 psia and 34% O₂ the prebreathe would be minimal. These values need to be validated prior to implementation.

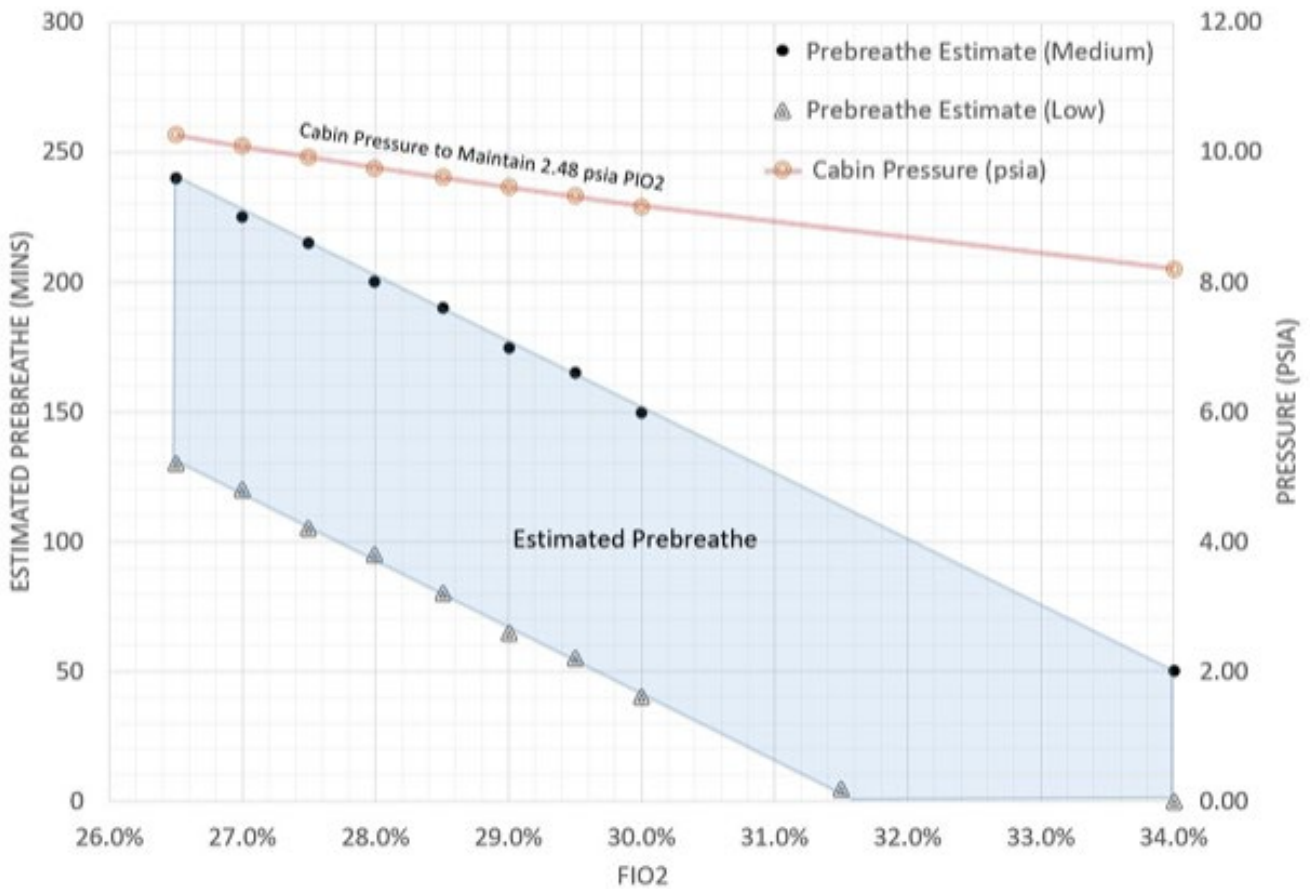

Prebreathe Estimates based on 2.48 psia P_iO₂ and 4.3 psia space suit operating pressure

Note: The Apollo program used a 5.0 psia 100% O₂ cabin atmosphere, thereby eliminating DCS risk and the need for prebreathe.



Back-Up



Major Changes Between Revisions

Rev B → Rev C

- Updated information to be consistent with NASA-STD-3001 Volume 1 Rev C and Volume 2 Rev D

Rev A → Rev B

- Updated information to be consistent with NASA-STD-3001 Volume 1 Rev B and Volume 2 Rev C

Original → Rev A

Slide 1

- Minor update to Executive Summary

Slide 2

- Updated Background information

Slide 3

- Past Protocols updated with additional information
- Additional notes added
- Table and references removed and updated on additional slides
Application Notes slide removed completely

Slide 5

- Added slide to capture new pre-breathe table

Slide 7

- Added slide detailing Referenced Standards

Slide 8

- Added slide with additional references



View the current versions of NASA-STD-3001 Volume 1 & Volume 2 on the [OCHMO Standards website](#)

Referenced Technical Requirements

NASA-STD-3001 Volume 1 Revision C

[V1 3003] In-Mission Preventive Health Care All programs shall provide training, in-mission capabilities, and resources to monitor physiological and psychosocial well-being and enable delivery of in-mission preventive health care, based on epidemiological evidence-based probabilistic risk assessment (PRA), individual crewmember needs, clinical practice guidelines, flight surgeon expertise, historical review, mission parameters, and vehicle-derived limitations. These analyses consider the needs and limitations of each specific vehicle and design reference mission (DRM) with particular attention to parameters such as mission duration, expected return time to Earth, mission route and destination, expected radiation profile, concept of operations, and more. In-mission preventive care includes, but is not limited to: (see NASA-STD-3001, Volume 1 Rev C for full standard).

[V1 3004] In-Mission Medical Care All programs shall provide training, in-mission medical capabilities, and resources to diagnose and treat potential medical conditions based on epidemiological evidence-based PRA, individual crewmember needs, clinical practice guidelines, flight surgeon expertise, historical review, mission parameters, and vehicle-derived limitations. These analyses consider the needs and limitations of each specific vehicle and design reference mission (DRM) with particular attention to parameters such as mission duration, expected return time to Earth, mission route and destination, expected radiation profile, concept of operations, and more. In-mission capabilities (including hardware and software), resources (including consumables), and training to enable in-mission medical care, and behavioral care, are to include, but are not limited to: (see NASA-STD-3001, Volume 1 Rev C for full standard).

[V1 5001] Medical Training Medical training shall be provided to crewmembers, flight surgeons (FSs), mission control support staff, and other ground support personnel (GSP).

[V1 5002] Crewmember Training Beginning with the crewmember candidate year, general medical training, including but not limited to, first aid, cardiopulmonary resuscitation (CPR), altitude physiological training, carbon dioxide exposure training, familiarization with medical issues, procedures of spaceflight, psychological training, toxicology, medical equipment, and supervised physical conditioning training shall be provided to the astronaut corps.

[V1 5003] Crew Medical Officer Medical Training Crewmembers who have received a mission assignment as a Crew Medical Officer (CMO) shall be provided with detailed and specific medical training, including but not limited to, health issues, space physiology, behavioral health, medical procedures, medical equipment, toxicology, and countermeasures.

NASA-STD-3001 Volume 2 Revision D

[V2 6002] Inert Diluent Gas Cabin atmospheric composition shall contain at least 30% diluent gas (assuming balance oxygen).

[V2 6003] O₂ Partial Pressure Range for Crew Exposure The system shall maintain inspired oxygen partial pressure (P_{iO_2}) in accordance with Table 6.2-1—Inspired Oxygen Partial Pressure Exposure Ranges.

[V2 6006] Total Pressure Tolerance Range for Indefinite Crew Exposure The system shall maintain the pressure to which the crew is exposed to between 34.5 kPa < pressure ≤ 103 kPa (5 psia < pressure ≤ 15.0 psia) for indefinite human exposure without measurable impairments to health or performance.



View the current versions of NASA-STD-3001 Volume 1 & Volume 2 on the [OCHMO Standards website](#)

Referenced Technical Requirements

NASA-STD-3001 Volume 2 Revision D

[V2 6007] Rate of Pressure Change For pressure changes >1.0 psi, the rate of change of total internal vehicle pressure shall not exceed 13.5 psi/min.

[V2 6008] Decompression Sickness (DCS) Risk Identification Each program shall define mission unique DCS mitigation strategies to achieve the level of acceptable risk of DCS as defined below within 95% statistical confidence:

- a. DCS \leq 15% (includes Type I or isolated cutis marmorata).
- b. Grade IV venous gas emboli (VGE) \leq 20%.
- c. Prevent Type II DCS.

[V2 6009] Decompression Sickness Treatment Capability The system shall provide DCS treatment capability.

[V2 6017] Atmospheric Control The system shall allow for local and remote control of atmospheric pressure, humidity, temperature, ventilation, and ppO₂.

[V2 6022] Atmospheric Monitoring and Alerting Parameters The system shall display real-time values for pressure, humidity, temperature, ppO₂, and ppCO₂ data to the crew locally and remotely.

[V2 7043] Medical Capability A medical system shall be provided to the crew to meet the medical requirements of NASA-STD-3001, Volume 1.

[V2 9053] Protective Equipment Protective equipment shall be provided to protect the crew from expected hazards.

[V2 11100] Pressure Suits for Protection from Cabin Depressurization The system shall provide the capability for crewmembers to wear pressure suits for sufficient duration during launch, entry, descent (to/from Earth, or other celestial body) and any operation deemed high risk for loss of crew life due to loss of cabin pressurization (such as in mission dockings, operations during periods of high incidence of Micrometeoroids and Orbital Debris (MMOD) or complex vehicle maneuvers).

[V2 11032] LEA Suited Decompression Sickness Prevention Capability LEA spacesuits shall be capable of operating at sufficient pressure to protect against Type II decompression sickness in the event of a cabin depressurization.

[V2 11036] Suited Atmospheric Monitoring and Alerting Suits shall monitor suit pressure, ppO₂, and ppCO₂ and alert the crewmember when they are outside safe limits.



Reference List

1. Abercromby AFJ, Anchondo C, Blanco RA, Cerimele MP, Conkin J, Counts CA, Cox SR, Dervay JP, Gernhardt ML, Moynihan S, Ross SD, Sanders RW. (2019). Suited ground vacuum chamber testing decompression sickness tiger team report. Houston, TX: NASA Johnson Space Center. NASA Technical Publication NASA/TP-2019220343.
2. Abercromby AFJ, Conkin J, Gernhardt ML. (2015). Modeling a 15-min extravehicular activity prebreathe protocol using NASA's exploration atmosphere (56.5kPa/34% O₂). *Acta Astronautica*, 109: 76–87.
3. Conkin J. (2001). Evidence-based approach to the analysis of serious decompression sickness with application to EVA astronauts. NASA Technical Publication 2001-210196, Houston: Johnson Space Center.
4. Conkin J. (2011). Preventing decompression sickness over three decades of extravehicular activity. NASA Technical Publication NASA/TP-2011-216147, Johnson Space Center.
5. Conkin J. (2020). Probability of decompression sickness and venous gas emboli from 49 NASA hypobaric chamber tests with reference to Exploration Atmosphere. Houston, TX: NASA Johnson Space Center. NASA Technical Publication NASA/TP-2020-220529.
6. Conkin J, Abercromby AFJ, Dervay JP, Feiveson AH, Gernhardt ML, Norcross JR, Ploutz-Snyder R, Wessel JH, III. Hypobaric decompression sickness treatment model. (2015). *Aerosp Med Hum Perform*, 86: 508-17.
7. Conkin J, Abercromby AFJ, Dervay JP, Feiveson AH, Gernhardt ML, Norcross J, Ploutz-Snyder R, Wessel JH, III. (2014). Probabilistic assessment of treatment success for hypobaric decompression sickness. NASA Technical Publication NASA/TP-2014-218561. NASA Johnson Space Center, Houston, TX.
8. Conkin J, Gernhardt ML, Powell MR, Pollock NW. (2004). A probability model of decompression sickness at 4.3 psia after exercise prebreathe. NASA Technical Publication NASA/TP-2004-213158. Johnson Space Center, Houston, TX.
9. Conkin J, KV Kumar, MR Powell, PP Foster, JM Waligora. (1996). A probability model of hypobaric decompression sickness based on 66 chamber tests. *Aviat Space Environ Med*, 67: 176-83.
10. Conkin J, Pollock NW, Natoli MJ, Martina SD, Wessel JH, III, Gernhardt ML. (2017). Venous gas emboli and ambulation at 4.3 psia. *Aerosp Med Hum Perform*, 88: 370-76.
11. Conkin J, Powell MR. (2001). Lower body adynamias a factor to reduce the risk of hypobaric decompression sickness. *Aviat Space Environ Med*, 72: 202-14.
12. Gernhardt ML, Dervay JP, Waligora JM, Fitzpatrick DT, Conkin J. Extravehicular Activities (Chap. 5.4). In: Risin D, Stepaniak PC, eds. Biomedical Results of the Space Shuttle Program. Washington, DC: U.S. Government Printing Office, NASA/SP-2013-607, 2013; 315-26.
13. Henninger D. (2010). NASA Exploration Atmospheres Working Group Recommendations for exploration spacecraft internal atmospheres: The final report of the NASA Exploration Atmospheres Working Group. NASA Technical Publication NASA/TP-2010-216134.
14. Recommendations for Exploration Spacecraft Internal Atmospheres: The Final Report of the NASA Exploration Atmospheres Working Group. NASA Technical Publication NASA/TP-2010-216134. Johnson Space Center, Houston, TX. October 2010.
15. Waligora JM, DJ Horgan, Jr., J Conkin, AT Hadley, III. (1984). Verification of an altitude decompression sickness protocol for Shuttle operations utilizing a 10.2 psi pressure stage. NASA Technical Memorandum 58259, Johnson Space Center, Houston, TX.
16. Webb JT, KrockLP, GernhardtML. (2010). Oxygen Consumption at Altitude as a Risk Factor for Altitude Decompression Sickness. *Aviation, Space, and Environmental Medicine*, 81(11).