


CARVING INSTRUCTIONS

- Carefully cut a hole in the top of the pumpkin for the lid. Make sure to angle your blade inward to create a ledge for the lid.
- 2. Scoop out the seeds and strings with a spoon. Scrape the flesh from the inside of the pumpkin until it is about 1 inch thick where you would like to carve. Scrape to smooth the interior bottom.
- **3.** Trim excess paper, leaving 1/2 inch-border around the pattern. Fold along crease lines if necessary and tape in place, making sure the pattern is smooth on the surface.
- Poke holes through the pattern along the lines using a push pin or pumpkin poker. Remove the paper once fully transferred.
- 5. Saw dot to dot, keeping the blade at a 90° angle and being careful not to apply too much pressure to the pumpkin. Re-insert the blade to change directions. Push the cut piece out gently from the inside out. It is recommended to start with the smallest piece first.
- 6. Place light inside and put the lid back on.



MOVE REMOV EMOVE REMOV EMOVE REMOV EMOVE REMOV

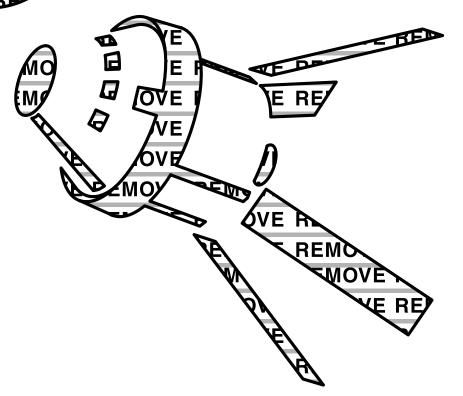


CARVING INSTRUCTIONS

- Carefully cut a hole in the top of the pumpkin for the lid. Make sure to angle your blade inward to create a ledge for the lid.
- 2. Scoop out the seeds and strings with a spoon. Scrape the flesh from the inside of the pumpkin until it is about 1 inch thick where you would like to carve. Scrape to smooth the interior bottom.
- **3.** Trim excess paper, leaving 1/2 inch-border around the pattern. Fold along crease lines if necessary and tape in place, making sure the pattern is smooth on the surface.
- Poke holes through the pattern along the lines using a push pin or pumpkin poker. Remove the paper once fully transferred.

LO THERE MO

- 5. Saw dot to dot, keeping the blade at a 90° angle and being careful not to apply too much pressure to the pumpkin. Re-insert the blade to change directions. Push the cut piece out gently from the inside out. It is recommended to start with the smallest piece first.
- 6. Place light inside and put the lid back on.


SPACE LAUNCH SYSTEM (SLS)

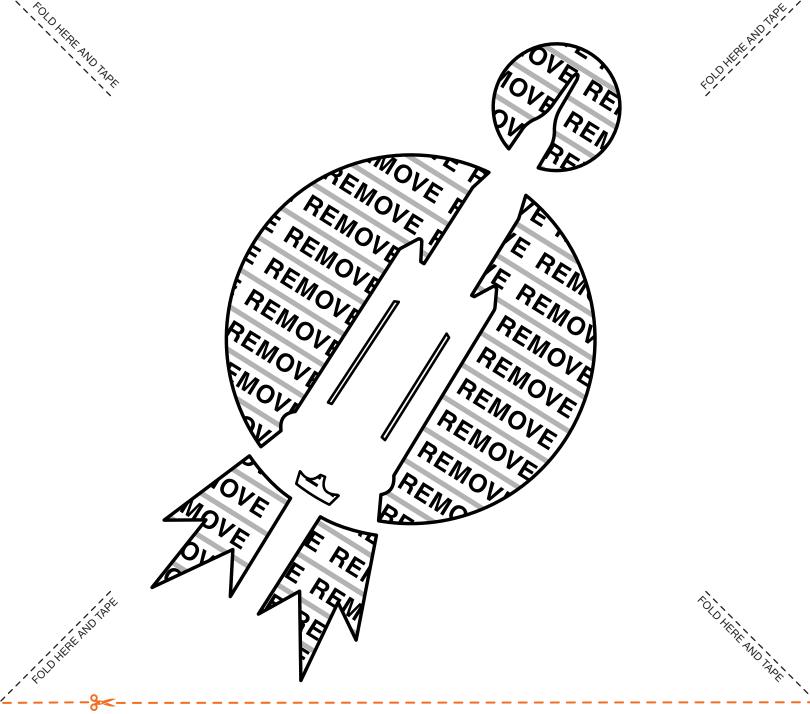

CARVING INSTRUCTIONS

- Carefully cut a hole in the top of the pumpkin for the lid. Make sure to angle your blade inward to create a ledge for the lid.
- 2. Scoop out the seeds and strings with a spoon. Scrape the flesh from the inside of the pumpkin until it is about 1 inch thick where you would like to carve. Scrape to smooth the interior bottom.
- **3.** Trim excess paper, leaving 1/2 inch-border around the pattern. Fold along crease lines if necessary and tape in place, making sure the pattern is smooth on the surface.
- Poke holes through the pattern along the lines using a push pin or pumpkin poker. Remove the paper once fully transferred.
- 5. Saw dot to dot, keeping the blade at a 90° angle and being careful not to apply too much pressure to the pumpkin. Re-insert the blade to change directions. Push the cut piece out gently from the inside out. It is recommended to start with the smallest piece first.
- 6. Place light inside and put the lid back on.

VEHICLE ASSEMBLY BUILDING (VAB)

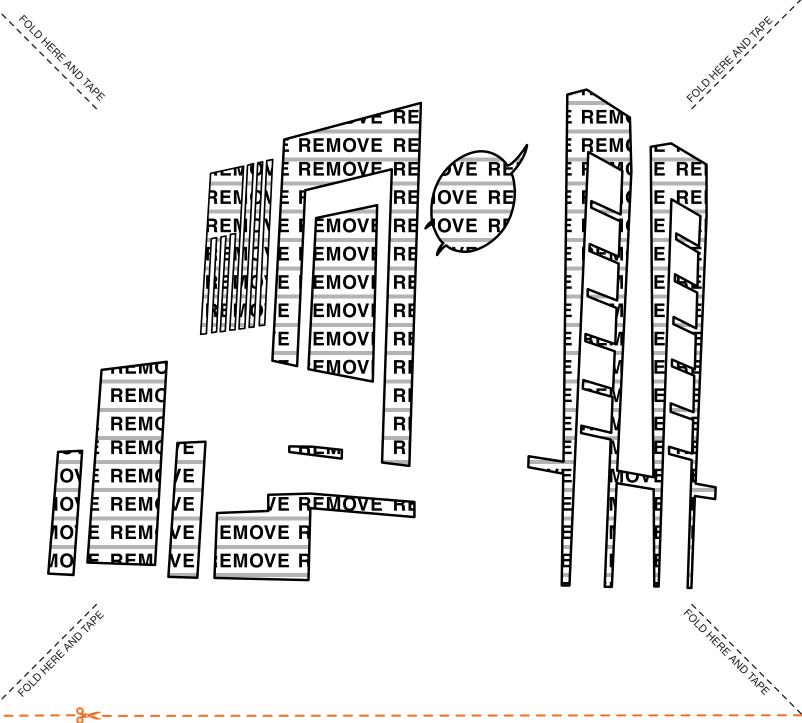

CARVING INSTRUCTIONS

- Carefully cut a hole in the top of the pumpkin for the lid. Make sure to angle your blade inward to create a ledge for the lid.
- 2. Scoop out the seeds and strings with a spoon. Scrape the flesh from the inside of the pumpkin until it is about 1 inch thick where you would like to carve. Scrape to smooth the interior bottom.
- **3.** Trim excess paper, leaving 1/2 inch-border around the pattern. Fold along crease lines if necessary and tape in place, making sure the pattern is smooth on the surface.
- Poke holes through the pattern along the lines using a push pin or pumpkin poker. Remove the paper once fully transferred.
- 5. Saw dot to dot, keeping the blade at a 90° angle and being careful not to apply too much pressure to the pumpkin. Re-insert the blade to change directions. Push the cut piece out gently from the inside out. It is recommended to start with the smallest piece first.
- 6. Place light inside and put the lid back on.